

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.com
Web site: <http://www.apracings.com>

© AP Racing Ltd. 2005

DISC PART NUMBERS

CP3581-1080 RH AS DRAWN
CP3581-1081 LH OPPOSITE
THIS IS A 48 VANE DISC OF MASS 6.2 Kg

USE BOBBIN PART No. CP2494-589MJ TO ACHIEVE STANDARD 0.45/0.35 FLOAT.




THIS DISC WAS DESIGNED TO WORK WITH A D50 DEPTH PAD

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

SUFFIX TO DISC PART NUMBERS:-

SUFFIX	DETAILS
P	PLAIN (NO GROOVES)
CGnn	CURVED GROOVES AS SHOWN. VALUE nn IS THE NUMBER OF GROOVES PER FACE. eg CG8= 8 GROOVES PER FACE
Gnn	STRAIGHT GROOVES VALUE nn IS THE NUMBER OF GROOVES PER FACE.

DISC INSTALLATION

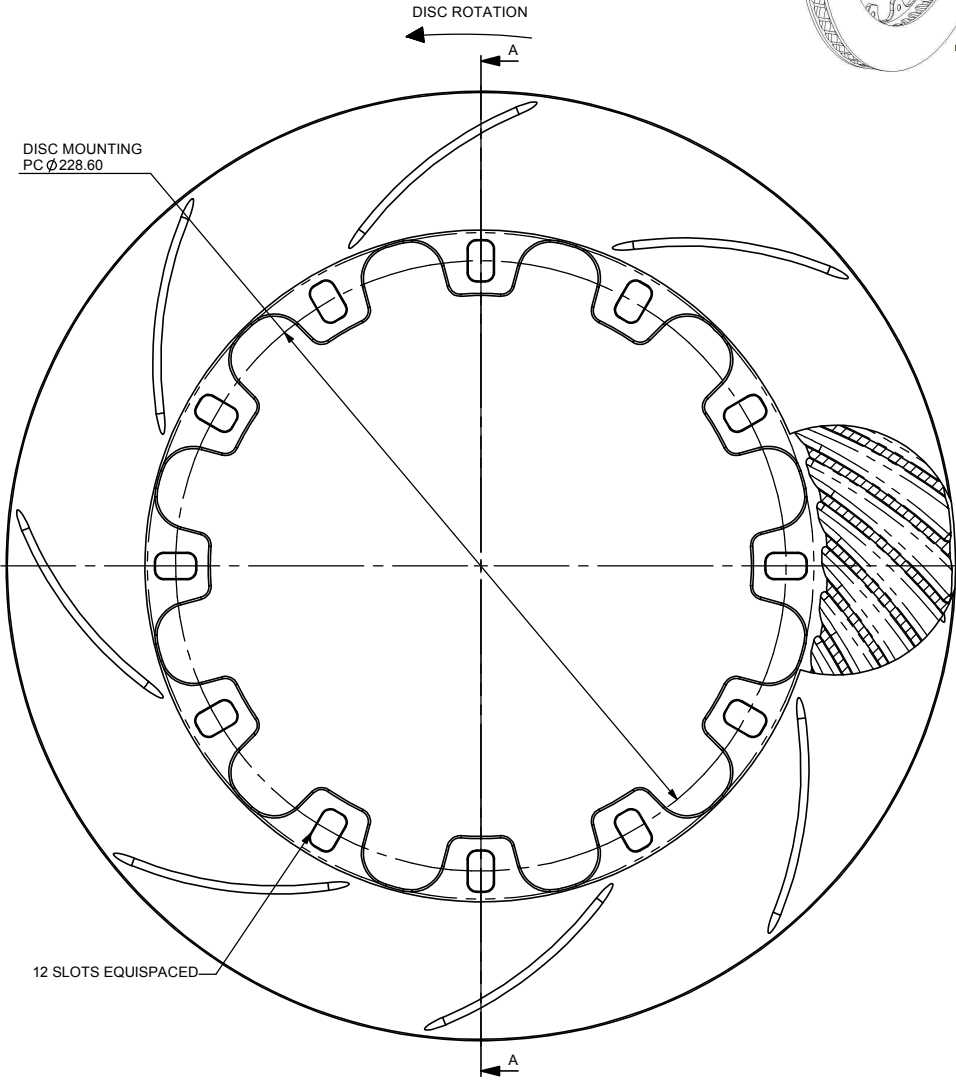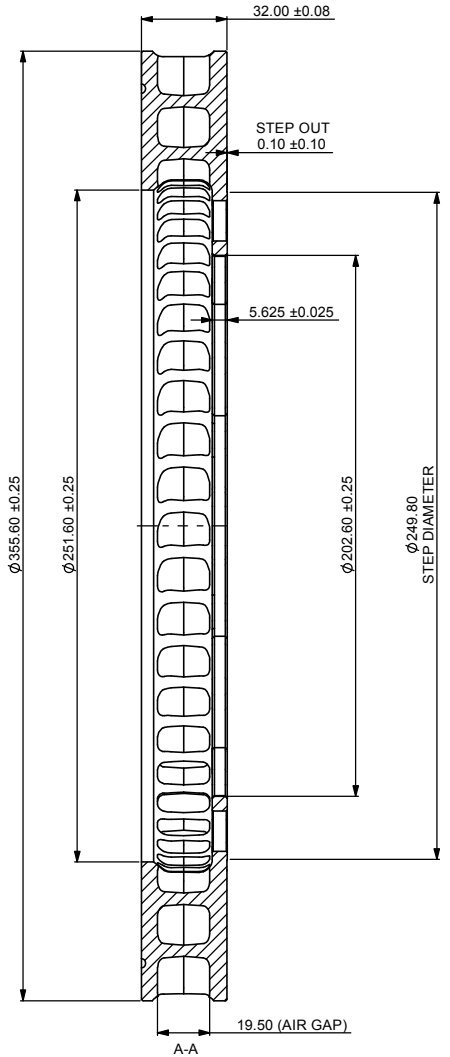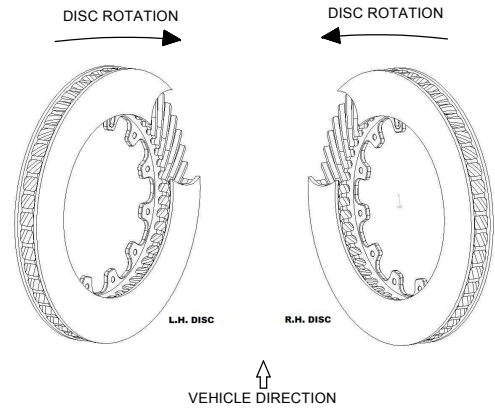

Issue No.	Alterations		Zone	Initials
	Date & No.	Particulars		
2	21/08/07	RE-DRAWN ON SOLID WORKS		
	34460;ID65	0.20/0.00 STEP AND Ø249.8 ADDED		

SCALE 1:1	SHEET 1 OF 1
DRAWN	D.ARROWSMITH
APPROVED	
DERIVED FROM	
TITLE	
Ø355.6 x 32.0	
VENTILATED DISC	
DRG NO.	CP3581-1080 / 1081 CD