

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.co.uk
Web site: <http://www.apracings.com>

© AP Racing Ltd. 2005

DISC PART NUMBERS


CP3580-1092 RH AS DRAWN
CP3580-1093 LH OPPOSITE
THIS IS A 48 VANE DISC OF MASS 4.4 Kg

THIS DISC WAS DESIGNED TO WORK WITH A D44 DEPTH PAD

SUFFIX TO DISC PART NUMBERS:-



SUFFIX DETAILS
Gn = STRAIGHT GROOVES AS SHOWN. VALUE n PER FACE
ie G8 MEANS 8 GROOVES PER FACE
GD = 4 GROOVES AND CROSS DRILLED.
(SEE ILLUSTRATION)

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.




GD TYPE

DISC INSTALLATION

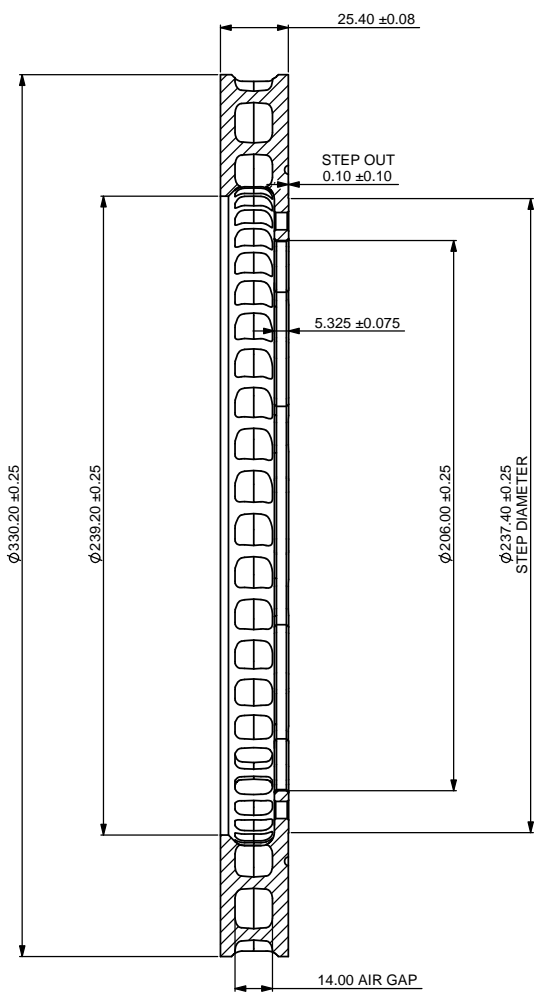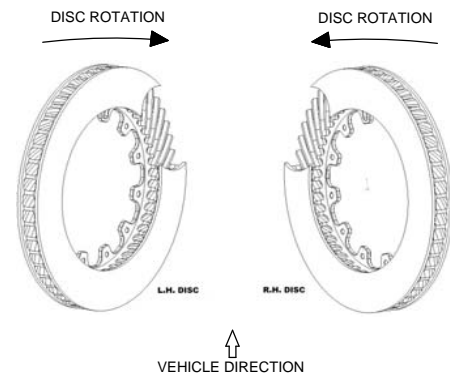

SECTION A-A
SCALE 1 : 1

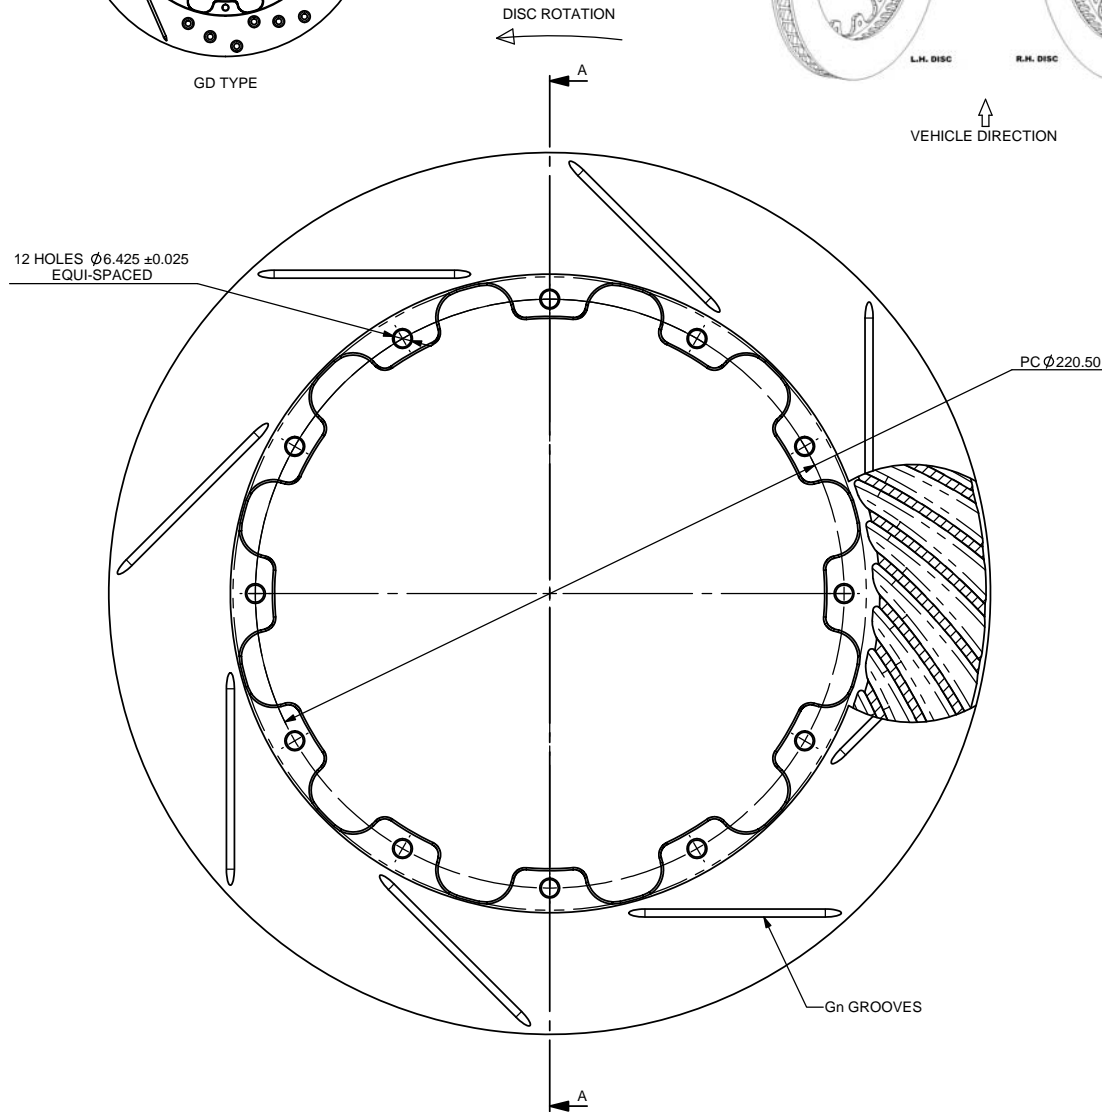

Issue No.	Alterations		Zone	Initials
	Date & No.	Particulars		
86	25/07/07	RE-DRAWN ON SOLID WORKS Ø239.2 WAS Ø240.2 STEP ADDED.		

SCALE 2:1		SHEET 1 OF 1	
DRAWN	D.ARROWSMITH		
APPROVED			
DERIVED FROM			
TITLE			
VENTED DISC Ø330.20 x 25.40			
DRG NO.	CP3580-1092 / 1093 CD		