

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.com
Web site: <http://www.apracings.com>

© AP Racing Ltd. 2005

DISC PART NUMBERS
CP3718-2068 RH AS DRAWN
CP3718-2069 LH OPPOSITE
THIS IS A 48 VANE DISC OF MASS 8.90 Kg





USE BOBBIN PART No. CP2494-589 TO ACHIEVE STANDARD 0.45/0.35 FLOAT.

SUFFIX TO DISC PART NUMBERS:-

SUFFIX	DETAILS
P	PLAIN (NO GROOVES)
CGnn	CURVED GROOVES AS SHOWN. VALUE nn PER FACE. eg CG8 MEANS 8 CURVED GROOVES PER FACE.
GA	J HOOK GROOVES POSITIONED IN RELATION TO MOUNTINGS

THIS DISC WAS DESIGNED TO WORK WITH A D55 DEPTH PAD

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

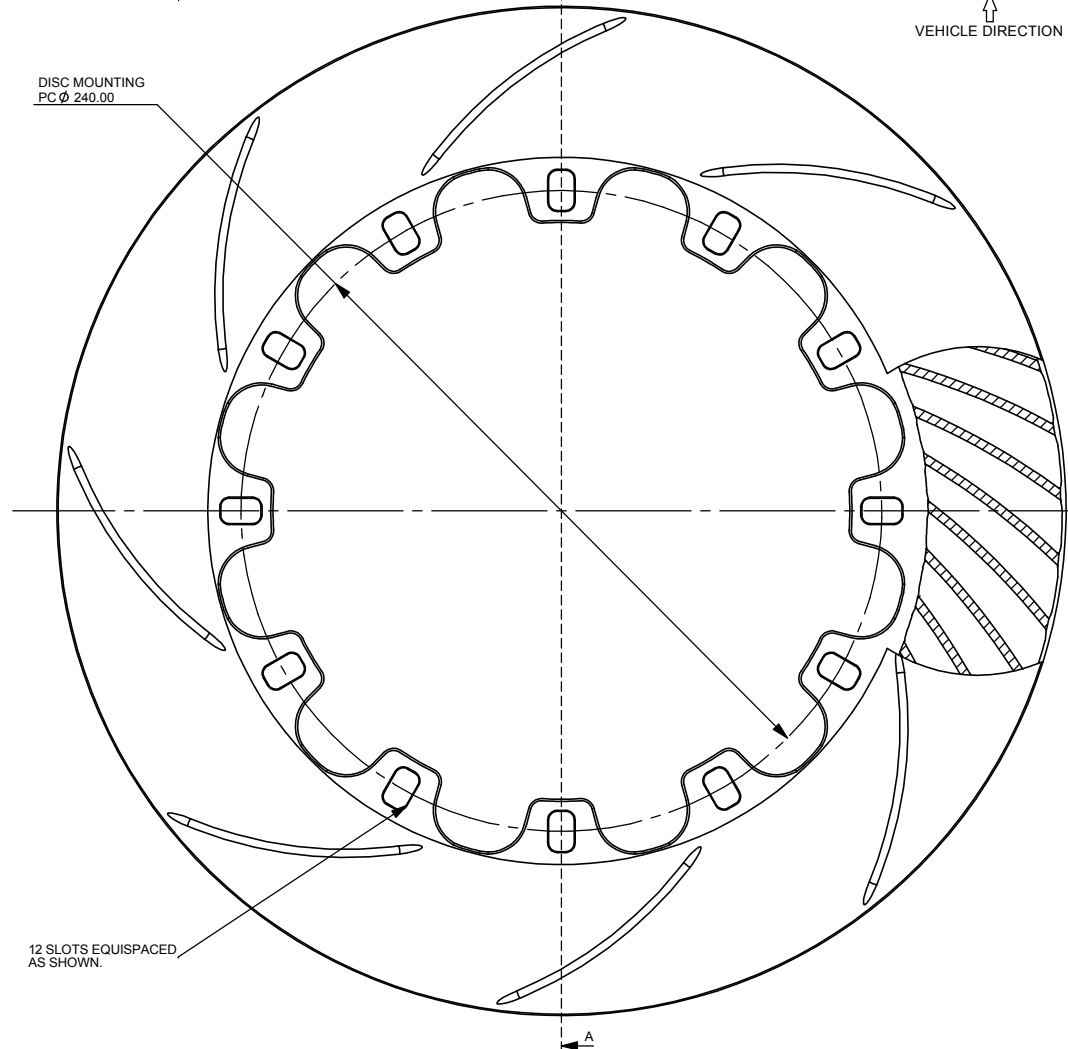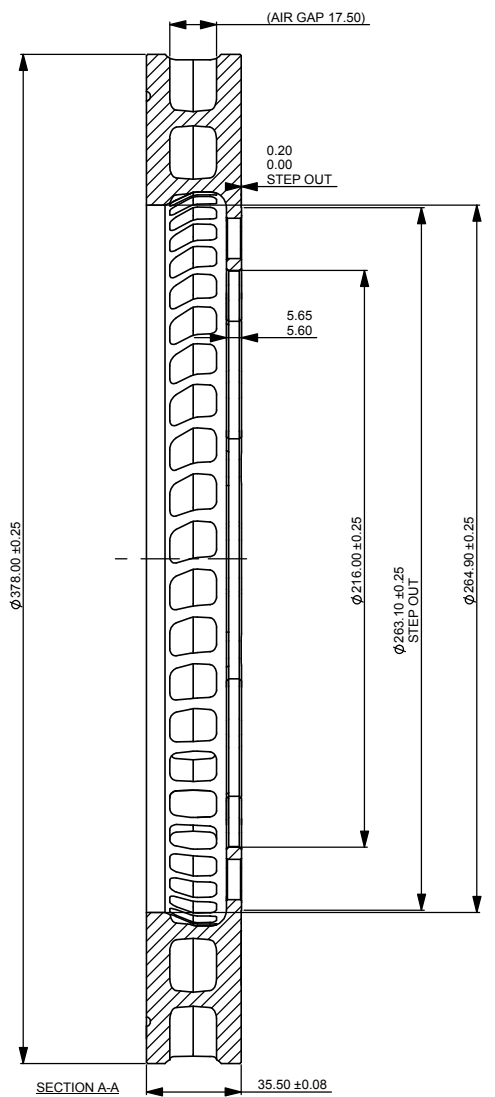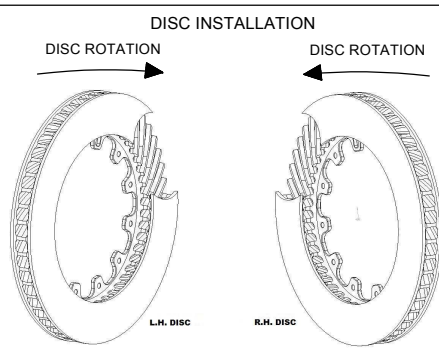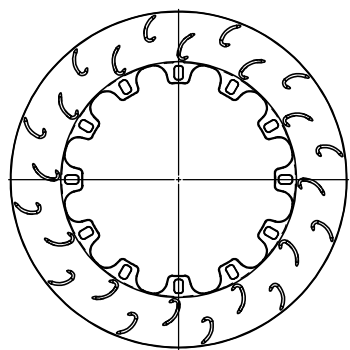

Issue No.	Date & No.	Alterations		
		Particulars	Zone	Initials
1	24/01/2001	FIRST ISSUE		DPL
2	13/05/02	UPDATED TO ADD MORE INFORMATION		DRA
3	15/05/08 B5195	DISC CONVERTED TO TWIN TURNING GA GROOVE OPTION ADDED		SAT
4	23/05/08 B5195	DISC THICKNESS 35.50±0.08 WAS 35.56±0.08		SAT

SCALE 1:1		SHEET 1 OF 1	
DRAWN	Steve Thomas		
APPROVED			
DERIVED FROM			
TITLE			
VENTILATED DISC MACHINING DRAWING			
DRG NO.	CP3718-2068/2069		