

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.co.uk
Web site: <http://www.apracings.com>

© AP Racing Ltd. 2005

DISC PART NUMBERS

CP3581-1078 RH AS DRAWN
CP3581-1079 LH OPPOSITE
THIS IS A 48 VANE DISC OF MASS 7.43Kg




USE BOBBIN PART No. CP2494-504MP TO ACHIEVE STANDARD 0.45/0.35 FLOAT.

THIS DISC WAS DESIGNED TO WORK WITH A D50 DEPTH PAD.

SUFFIX TO DISC PART NUMBERS:-

SUFFIX	DETAILS
P	PLAIN (NO GROOVES)
Gn	STRAIGHT GROOVES AS SHOWN, VALUE n PER FACE. eg G8 MEANS 8 GROOVES PER FACE.

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

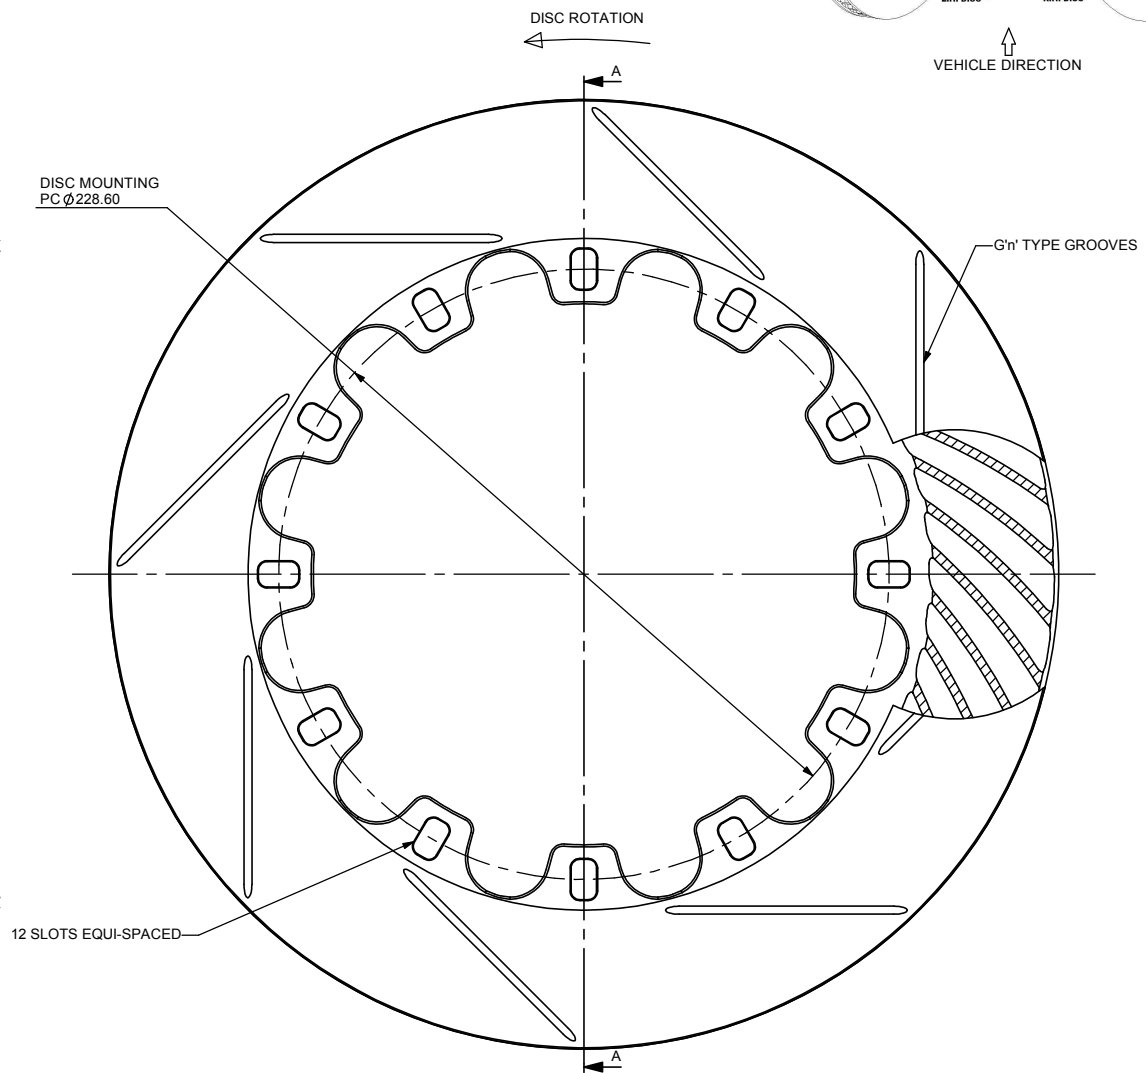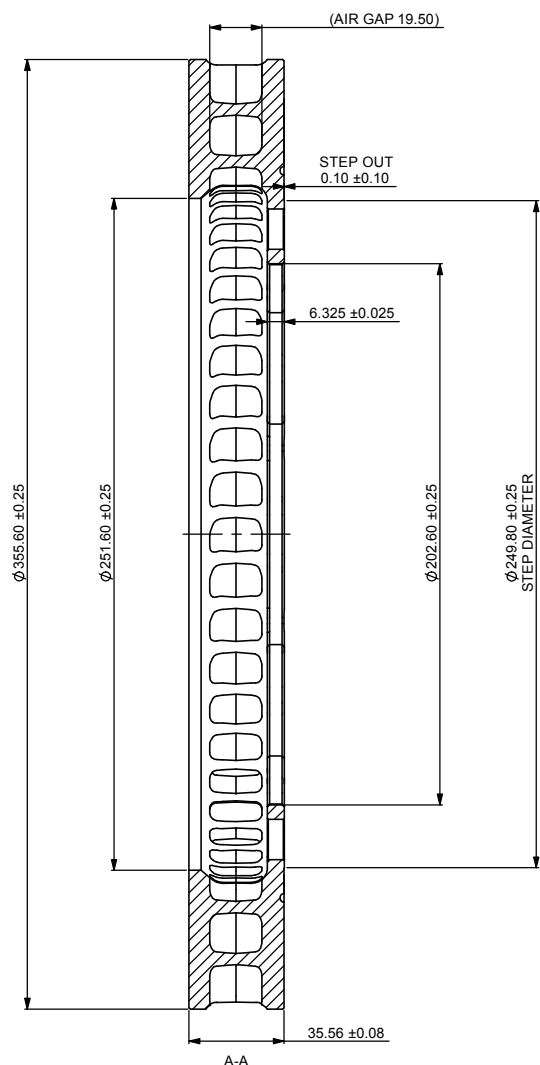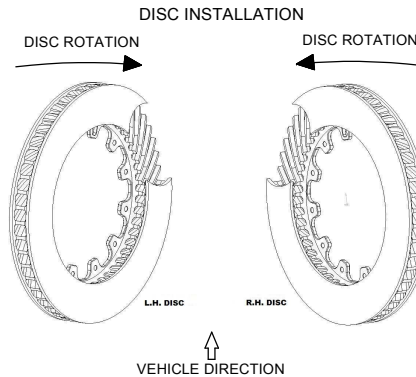

Issue No.	Alterations			Zone	Initials
	Date & No.	Particulars	#		
47	09/01/08	RE-DRAWN IN SOLID WORKS			
	B4460;ID90	0.20/0.00 STEP OUT ADDED			
		Ø249.8 STEP DIA ADDED.			

SCALE 1:1	SHEET 1 OF 1
DRAWN	D.ARROWSMITH
APPROVED	
DERIVED FROM	
TITLE	
Ø355.6 x 35.56	
VENTILATED DISC	
DRG NO.	CP3581-1078 / 9 CD