

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.com
Web site: <http://www.apracings.com>

© AP Racing Ltd. 2005

DISC PART NUMBERS

CP3836-2000 RH AS DRAWN
CP3836-2001 LH OPPOSITE

THIS IS A 36 VANE DISC OF MASS 5.30Kg

THIS DISC WAS DESIGNED TO WORK WITH A D45 DEPTH PAD




USE BOBBIN CP2494-589MJ TO ACHIEVE STD FLOAT 0.45/0.35

SUFFIX TO DISC PART NUMBERS:-

SUFFIX	DETAILS
P	PLAIN (NO GROOVES)
Gnn	STRAIGHT GROOVES AS SHOWN, VALUE nn PER FACE. eg G8 MEANS 8 GROOVVES PER FACE.

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

DISC INSTALLATION

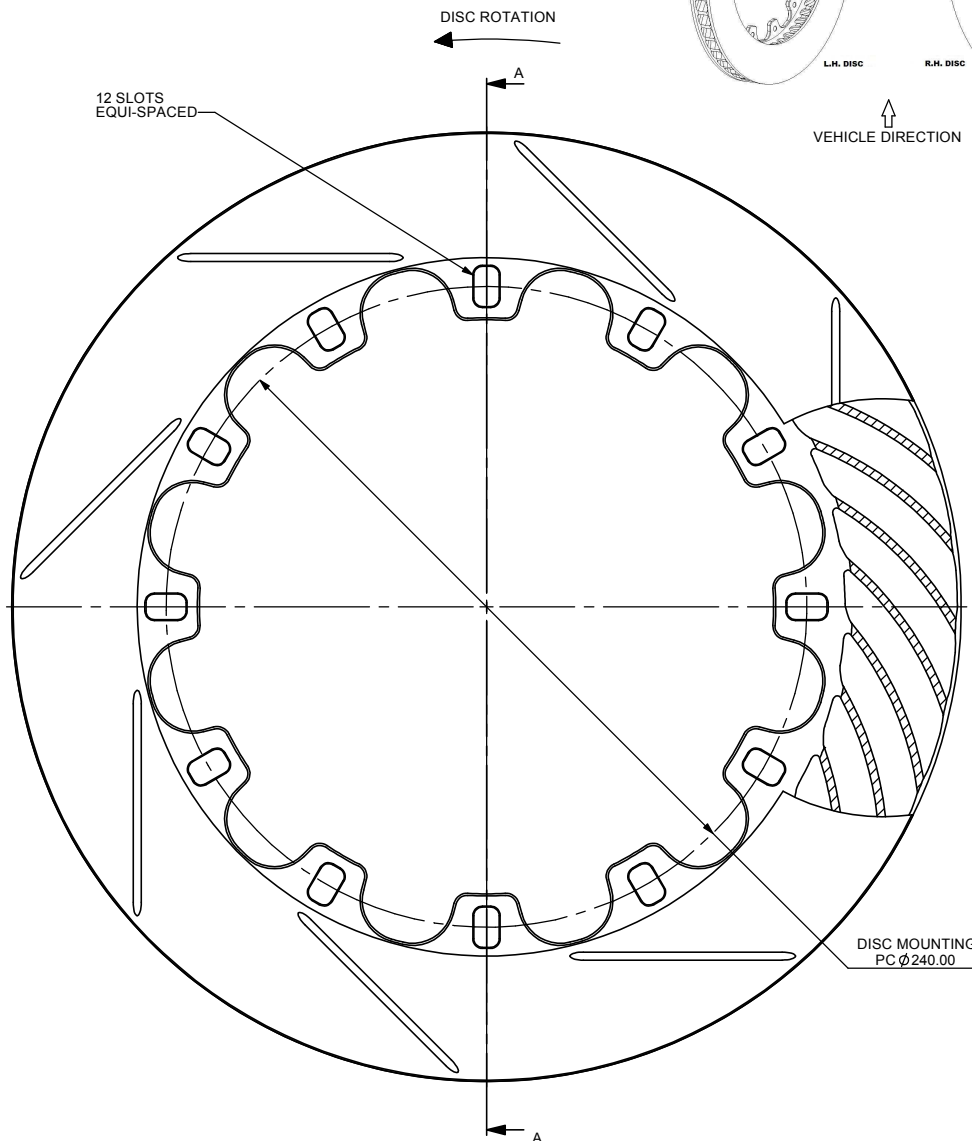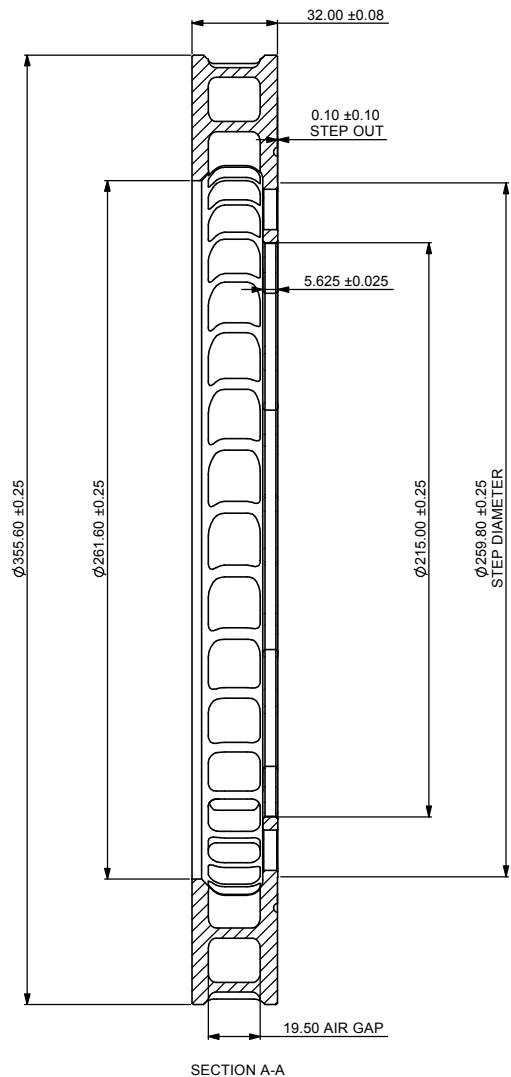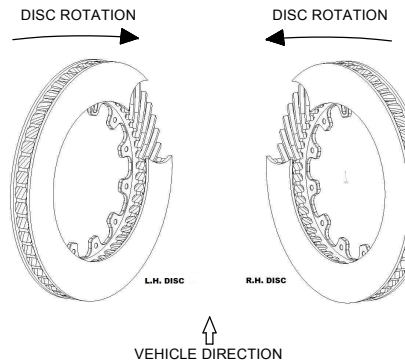

Issue No.	Date & No.	Alterations		Zone	Initials
		#	Particulars		
8	30/10/08				
	B4460: ID119		RE-DRAWN ON SOLID WORKS 0.20/0.0 STEP AND Ø259.8 DIA ADDED.		

SCALE 1:1	SHEET 1 OF 1
DRAWN	D.ARROWSMITH
APPROVED	
DERIVED FROM	
TITLE	
Ø355.6 x 32.0	
VENTILATED DISC	
DRG NO.	CP3836-2000 / 2001 CD