

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.

© AP Racing Ltd. 2002
 AP Racing
 Wheler Road
 Coventry
 CV3 4LB
 Tel: +44 024 7663 9595 e-mail: sales@apracing.co.uk
 Fax: +44 024 7663 9559 Web site: HTTP://www.apracing.com

DISC PART NUMBERS

CP3581-564CG RH AS DRAWN
 CP3581-565CG LH OPPOSITE
 THIS IS A 48 VANE DISC OF MASS 6.1 Kg

USE BOBBIN PART No. CP2494-589 TO ACHIEVE STANDARD 0.45/0.35 FLOAT.

SUFFIX TO DISC PART NUMBERS:-

SUFFIX	DETAILS
P	PLAIN (NO GROOVES)
CGnn	CURVED GROOVES AS SHOWN, VALUE nn PER FACE. eg CG8 MEANS 8 CURVED GROOVES PER FACE.




ADDITIONAL 'M' SUFFIX DENOTES DISC IS MADE FROM APRM00055 CASTING CP3581-3C.

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

DISC INSTALLATION

DISC ROTATION

DISC ROTATION

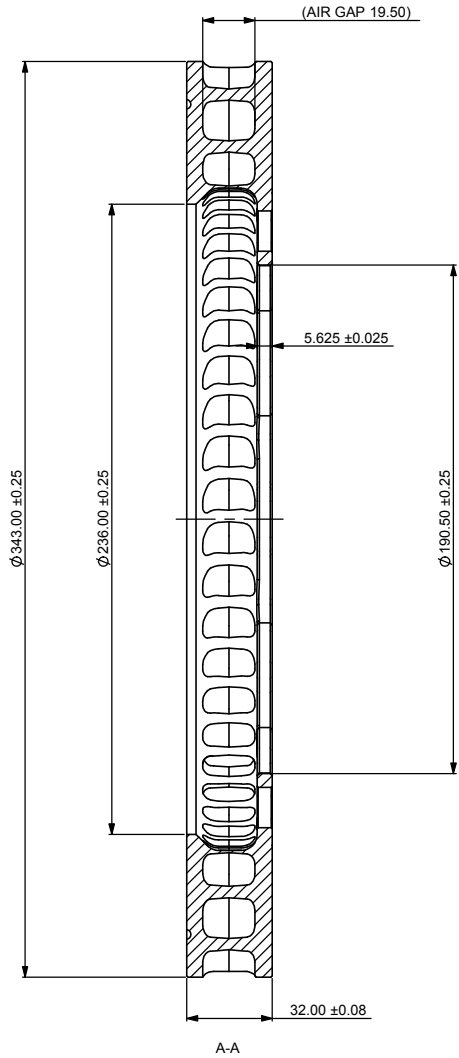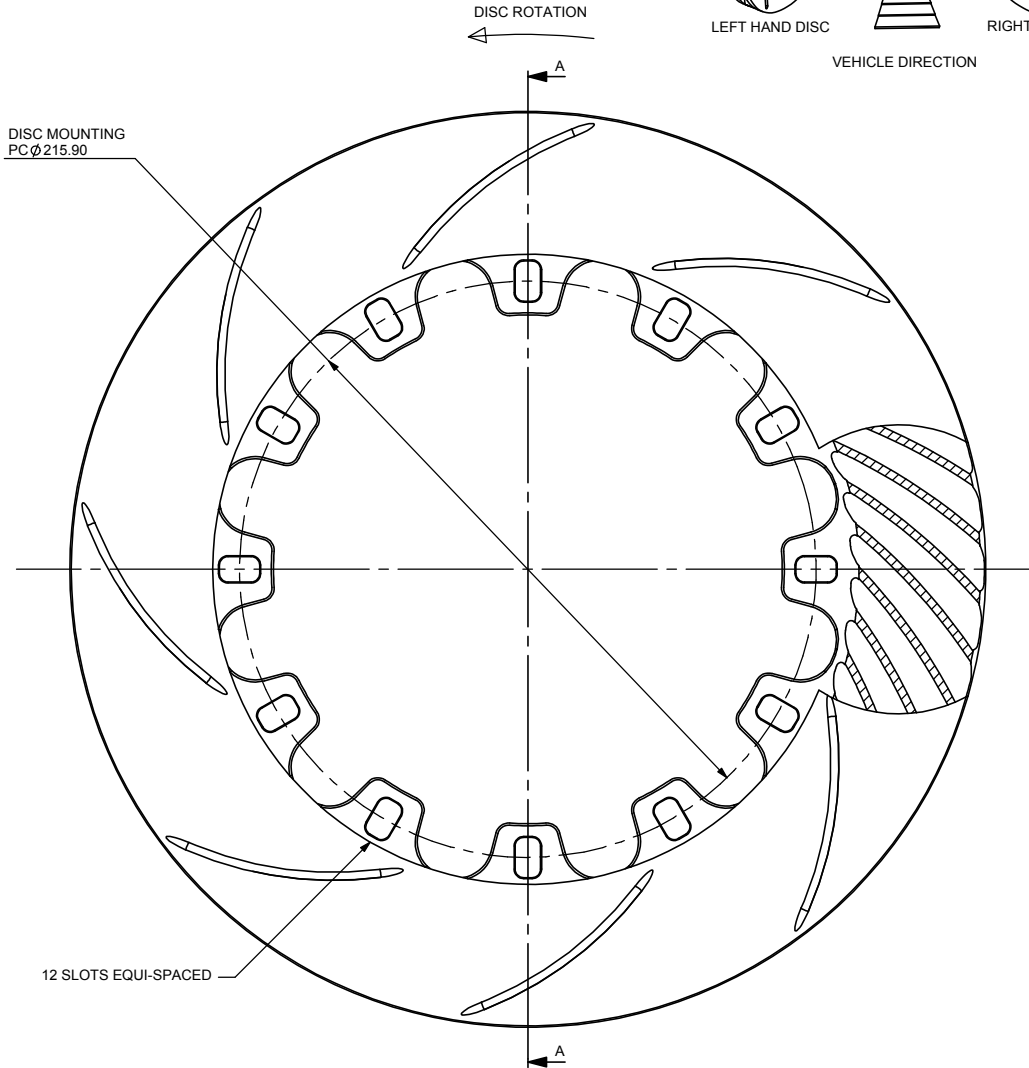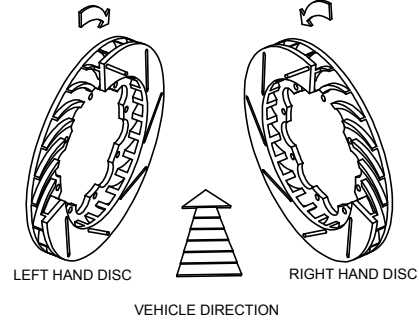

Issue No.	Alterations		Zone	Initials
	Date & No.	Particulars		
1	14/11/01 B3216	CURRENT ISSUE	#	DRA
2	23/01/02 RAC10218	MODIFIED TO SHOW RH VERSION	#	DRA
3	24/11/03 B3809	ALTERNATE MATERIAL 'M' SUFFIX NOTE ADDED	1K	SAT
4	15/12/03	CORRECTION TO PART No. NOTE: CP3581-594CD & -595CG READ CP3761	L1	DRA

SCALE 1:1 SHEET 1 OF 1

DRAWN: D.ARROWSMITH
 APPROVED: _____
 DERIVED FROM: _____

TITLE
**VENTILATED BRAKE DISC
 INSTALLATION DRAWING**

DRG NO. CP3581-564-5CG CD